



REF-KERATOMETER

SPECIFICATIONS

K/R Mode	Continuous Keratometry & Refractometry	
REF Mode	Refractometry	
KER Mode	Keratometry	
CLBC Mode	Contact Lens Base Curve Measurement	
KER P Mode	Peripheral Keratometry	
Color View Mode	Color View & Contact Lens Fitting Assistance (White & Blue LED Light)	

REFRACTOMETRY	
Vertex Distanc(VD)	0.0, 12.0, 13.5, 15.0
Sphere(SPH)	-30.00~+25.00 (VD=12mm) (Increments:0.01, 0.12, 0.25D)
Cylinder(CYL)	0.00 ± 12.00D (Increments 0.01, 0.12, 0.25D)
CLBC Mode	1~180° (Increments:1°)
Cylinder Form	-, +, ±
Pupil Distance	10~85mm
Minimum Pupil Diameter	ø2.0mm

KERATOMETRY	
Radius of Curvature	5.0~13.0mm (Increments: 0.01mm)
Corneal Power	25.96~67.50D (When comeal equivalent refractive index is 1.3375 (Increments: 0.05, 0.12, 0.25D)
Corneal Astigmatism	0.00~ -15.00D (Increments: 0.05, 0.12, 0.25D)
Axis	0~180° (Increments:1°)
Pupil, Iris Diameter	2.0~14.0mm (Increments:0.1mm)
Memory of Data	10 measurements for each eye
MOVEMENT RANGE	

Up-Down	±15mm	
Left-Right	±5mm ±2mm	
Forward-Backward	±5mm ±2mm	
		-

OTHERS


Display	7 inch Wide Color TFT LCD, Touch panel with Tilting function	
Internal Printer	Thermal Line Printer with Auto Cutting function	
Power Saving	Automatic switch-off(5min)	
Power Supply	AC100-240V, 50/60Hz(Free Voltage), 60W	
Dimension/Weight	262(W) x 518(D) x 441(H)mm / 20.9kg	

Desings and details can be changed without prior notice for improvements.



Huvitz Building 689-3, Geumjeong-dong Gunpo-si, Gyeonggi-do, 435-862, Korea

Tel:+82-31-442-8868 Fax: +82-31-477-8617 http://www.huvitz.com Distributed by

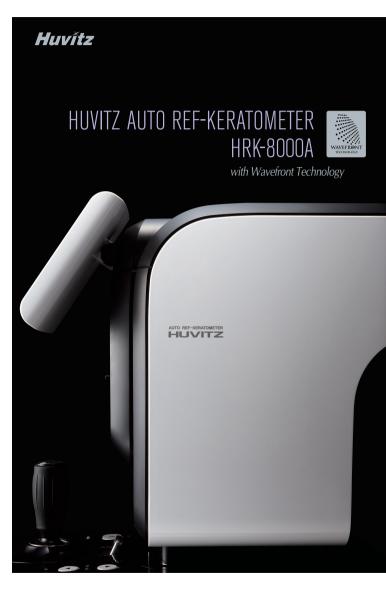

Extreme Precision & Accuracy!

Most Advanced Wavefront Technology,

HRK-8000A





High Order Aberrometry Data Output Opens Possibilities for High Market Trended Customized Lens Applications!

Optimized Optical System



Wavefront Technology measures the wavefront of light reflected from the retina and the refractive power with various sensors divided by sectors and analyzes them with extreme precision.

Micro Lens Array

Huvitz' own developed Micro Lens Array creates a number of separated focal spots, of which the pattern provides valuable information of the customer's ocular system.

Customized Lens Manufacturing

High order aberration and Zernike map data output function allow premium custom spectacle or contact lens manufacturers to improves vision accuracy and power.

More Data on Aberration Measurement



High order aberration data such as Coma, Trefoil, Spherical Aberration, Secondary Astigmatism, and Tetrafoil, which was only available in wavefront aberrometers, now is available in Huvitz HRK-8000A!

Clinical usage of this data is all in your hands!

High Order Aberration Map is on!



Besides the conventional data such as Spherical, Cylinder and Axis, the high order aberration data is displayed in a graphical Zernike refraction map for better understanding of patient's eyes and superior clinical decision making.

PSF & Image Simulation



Point Spread Function (PSF) and chart simulation of retinal display can make patients understood in a much better way of their clinical status of eyes and customized lens benefits.

Color View Mode!



The Full Color CCD camera and white Th LED light source in the auto ref- further the teratometer enable you to see eyes and contact lens fitting status which was previously only possible with slit Impression of the status which was previously only possible with slit Impression of the status which was previously only possible with slit Impression of the status was a status of the status which was previously only possible with slit Impression of the status of th

Peripheral Keratometry Measurement



HRK-8000A provides peripheral keratometry measurement data that can be greatly useful for fitting contact lenses

Ultra High Precision KER Data

Mire ring and LED sources enable highly reliable keratometry data of the corneal base curve to be obtained.

The World's First Contact Fitting Guides and Recommendations!



The World's First contact lens fitting function in an auto ref-keratometer enables you to see fluorescein liquid with blue illumination.

The HRK-8000A also analyzes and simulates the lens fitting status with automatic calculation and recommendation

Contact Lens Prescription Guide

Image capture and contrast regulation is possible.

The HRK-8000A gives you the best On-K fitting guide based on the base curve and KER value measured!

Unmatched Performance & Speed Provides Comfortable User Environment.

Touch & Tilting Color Display Screen



High brightness and contrast VGA 7" wide color TFT LCD screen provides with high resolution video images.

Smooth and free tilting function also offers you a comfortable and clear view at any angle.

Auto Tracking

The cutting edge auto sensor and 3 dimensional movement mechanism enables you to track down a measuring focus of an eye automatically and complete the measurement perfectly even with an inexperienced user.

Animated Guide



In case a measuring point is out of auto tracking range, the animated guide on the screen suggests how to operate the joystick in the easiest and most intuitive way.

Vision Comparison Function

The internal chart provides a vision comparison function of current vision and corrected vision.



Just by pressing the Up & Down buttons, users can set the height of the measuring point comfortably and quickly

Faster Measurement Speed

Faster measurement speed than any other competitors' equipment!

Comfortable One Touch Lock

The upper moving stage can be locked easily with the one touch button, making locking smooth and easy.

Quiet & Speedy Auto Cutting Printer



Automatic paper cutting and one touch paper roll change functions are new advantages of the HRK-8000A.

Ext. Monitor & Network Connectivity

Full HD video output through the HDMI port provides a differentiated explanation base for clinical consulting with your patients.

HRK-8000A supports network connectivity with Huvitz Digital Refraction System enabling easy and fast refraction in networking.